City of Edina

Comprehensive Water Resources Management Plan

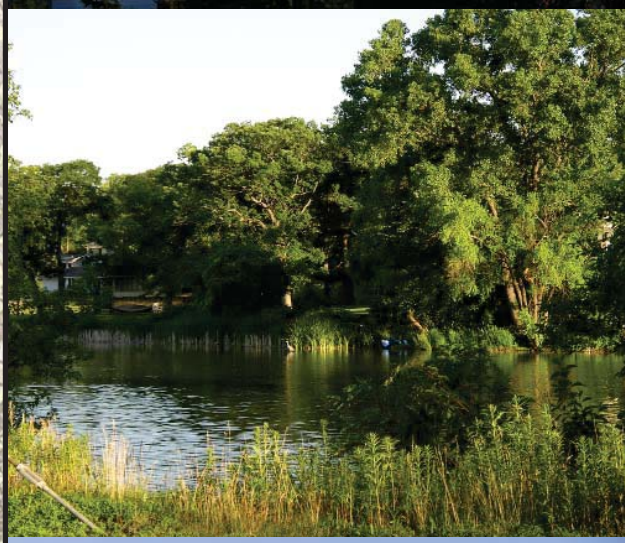

December 2011

Barr Engineering Co.
4700 West 77th Street
Minneapolis, MN 55435-4803
Phone: (952) 832-2600 • Fax: (952) 832-2601

City of Edina

Comprehensive Water Resource Management Plan

Prepared for
City of Edina

December 2011

4700 West 77th Street
Minneapolis, MN 55435-4803
Phone: (952) 832-2600
Fax: (952) 832-2601

City of Edina

Comprehensive Water Resource Management Plan

Table of Contents

List of Acronyms xvi

1.0 Executive Summary 1-1

1.1 Stormwater Management Goals & Policies 1-1

1.1.1 Runoff Management & Flood Control (Section 3.1) 1-1

1.1.2 Water Quality Management (Sections 3.2 and 3.3) 1-2

1.1.3 Wetland Protection (Section 3.4) 1-2

1.2 Problems, Issues and Potential Solutions 1-3

1.2.1 Water Resources Implementation Program 1-3

1.2.2 Runoff Management and Flood Control 1-3

1.2.3 Water Quality Management 1-4

2.0 Introduction and Physical Setting 2-1

2.1 Plan Purposes 2-1

2.2 Physical Setting 2-2

2.2.1 Drainage Patterns 2-2

2.2.2 Land Use 2-3

2.2.3 Soils 2-3

2.2.4 Topography 2-3

2.2.5 Water Quality Monitoring 2-4

2.2.5.1 Lakes 2-4

2.2.5.2 Creeks 2-4

2.2.6 Parks & Recreation 2-6

2.2.7 Public Utilities 2-6

2.2.8 Fish and Wildlife Habitat 2-6

2.2.9 Unique Features & Scenic Areas 2-7

2.2.10 Pollutant Sources 2-7

2.2.10.1 Investigation and Cleanup Sites 2-8

2.2.10.2 Tank Sites and Leak Sites 2-8

2.2.10.3 Individual Sewage Treatment Systems (ISTS) 2-8

2.2.11 Groundwater 2-8

3.0 Policies for Stormwater Management 3-1

3.1 Runoff Management and Flood Control 3-1

3.1.1 Runoff Management and Flood Control Policies 3-2

3.1.1.1 Minimum Building Elevations 3-3
3.1.1.2 Stormwater Management Design Standards 3-3
3.2 Water Quality 3-4
3.2.1 Background Water Quality Information 3-4
3.2.2 Water Quality Management Policies 3-6
3.2.3 Water Quality Management Standards 3-7
3.2.3.1 Stormwater Retention/Detention Systems 3-7
3.2.3.2 Construction Site Standards 3-7
3.3 Erosion and Sediment Control 3-7
3.3.1 Erosion and Sediment Control Policies 3-7
3.4 Wetlands 3-8
3.4.1 Wetlands Policies 3-8
3.5 Floodplain 3-8
3.6 Recreation and Habitat 3-9
3.7 Groundwater 3-9
3.8 Education Program 3-10
3.9 NPDES Considerations 3-11
4.0 Methodology for Modeling 4-1
4.1 Methodology for Hydrologic/Hydraulic Modeling 4-1
4.1.1 Hydrologic Modeling 4-1
4.1.1.1 Watershed Data 4-1
4.1.1.1.1 Watershed Area 4-1
4.1.1.1.2 Land Use Data 4-1
4.1.1.1.3 Watershed Width and Slope 4-3
4.1.1.2 Rainfall Data 4-3
4.1.1.3 Infiltration Data 4-4
4.1.1.3.1 Soils 4-4
4.1.1.3.2 Horton Infiltration 4-4
4.1.1.4 Depression Storage Data 4-5
4.1.2 Hydraulic Modeling 4-5
4.1.2.1 Storm Sewer Network 4-5
4.1.2.1.1 Assumptions 4-5
4.1.2.1.2 Tailwater Effects 4-6
4.1.2.2 Overland Flow Network 4-6
4.2 Methodology for Water Quality Modeling 4-7
4.2.1 Watershed Characteristics 4-8
4.2.1.1 Impervious Fraction 4-8
4.2.1.2 Pervious Curve Number 4-9
4.2.1.3 Other P8 Watershed Input Parameters 4-9
4.2.2 Treatment Device Characteristics 4-10

4.2.2.1 Dead Storage 4-10
4.2.2.2 Live Storage 4-10
4.2.2.3 Other P8 Treatment Device Input Characteristics 4-10
4.2.3 Precipitation and Temperature Data 4-11
4.2.4 Selection of Other P8 Model Parameters 4-11
4.2.4.1 Time Step, Snowmelt, and Runoff Parameters 4-11
4.2.4.2 Particle File Selection 4-12
4.2.4.3 Passes through the Storm File 4-12
5.0 Nine Mile Creek- North 5-1
5.1 General Description of Drainage Area 5-1
5.1.1 Drainage Patterns 5-1
5.1.1.1 Mirror Lake 5-1
5.1.1.2 Highlands Lake 5-2
5.1.1.3 Hawkes Lake 5-2
5.1.1.4 Mud Lake (Bredesen Park) 5-2
5.1.1.5 Nine Mile North 5-3
5.2 Stormwater System Analysis and Results 5-3
5.2.1 Hydrologic/Hydraulic Modeling Results 5-3
5.2.2 Water Quality Modeling Results 5-5
5.3 Implementation Considerations 5-6
5.3.1 Flood Protection Projects 5-6
5.3.1.1 Hawkes Drive (HL_2) 5-6
5.3.1.2 5711 & 5717 Grove Street (HL_18) 5-7
5.3.1.3 5516 & 5520 Dundee Road (HL_25) 5-7
5.3.1.4 505, 509, & 513 Tyler Court (ML_19) 5-7
5.3.1.5 6009 Leslie Lane (MD_22) 5-8
5.3.1.6 5316 Schaeffer Road (MD_28) 5-8
5.3.1.7 Fountain Woods Apartments (NMN_90 & NMN_23) 5-9
5.3.2 Construction/Upgrade of Water Quality Basins 5-9
5.3.2.1 MD_15 5-9
5.3.2.2 NMN_27 5-10
5.3.2.3 NMN_24 5-10
5.3.2.4 NMN_49 5-10
5.3.2.5 MD_3 5-10
6.0 Nine Mile Creek—Central 6-1
6.1 General Description of Drainage Area 6-1
6.1.1 Drainage Patterns 6-1
6.1.1.1 Colonial Ponds 6-1
6.1.1.2 Indian Pond 6-1

6.1.1.3 Nine Mile Central 6-2
6.2 Stormwater System Analysis and Results 6-2
6.2.1 Hydrologic/Hydraulic Modeling Results 6-2
6.2.2 Water Quality Modeling Results 6-4
6.3 Implementation Considerations 6-5
6.3.1 Flood Protection Projects 6-5
6.3.1.1 6005 & 6009 Crescent Drive (manhole 457) 6-5
6.3.1.2 Cherokee Trail & Gleason Backyard Depression Area (IP_4) 6-6
6.3.1.3 5339 West 64th Street (NMC_80) 6-6
6.3.1.4 Valley View Road & Hillside Road (NMC_86, NMC_120) 6-6
6.3.1.5 West 66th Street & Naomi Drive Area (NMC_71, NMC_103) 6-7
6.3.1.6 6712, 6716, 6720 Ridgeview Drive (NMC_106) 6-7
6.3.1.7 6808, 6812, 6816, 6820 Ridgeview Drive (NMC_107) 6-8
6.3.2 Construction/Upgrade of Water Quality Basins 6-8
7.0 Lake Cornelia/Lake Edina/Adam's Hill 7-1
7.1 General Description of Drainage Area 7-1
7.1.1 Drainage Patterns 7-1
7.1.1.1 North Cornelia 7-1
7.1.1.2 South Lake Cornelia 7-2
7.1.1.3 Lake Edina 7-2
7.1.1.4 Adam's Hill Pond 7-2
7.2 Stormwater System Analysis and Results 7-3
7.2.1 Hydrologic/Hydraulic Modeling Results 7-3
7.2.2 Water Quality Modeling Results 7-4
7.3 Implementation Considerations 7-5
7.3.1 Flood Protection Projects 7-6
7.3.1.1 Swimming Pool Pond (NC_3)/North Lake Cornelia (NC_62) 7-6
7.3.1.2 Hibiscus Avenue (LE_53, LE_7, LE_10) 7-6
7.3.1.3 6312, 6316, 6321, 6329 Tingdale Avenue (NC_11) 7-7
7.3.1.4 St. Johns/Ashcroft and West 64th Street (NC_40, NC_26) 7-7
7.3.1.5 Barrie Road and Heritage Drive (NC_86, NC_97, NC_99) 7-7
7.3.1.6 York Avenue and West 64th Street (NC_88) 7-8
7.3.1.7 T.H. 62 at France Avenue (NC_132) 7-8
7.3.1.8 Parnell Avenue and Valley View Road (NC_135) 7-8
7.3.2 Construction/Upgrade of Water Quality Basins 7-9
7.3.2.1 LE_38 7-9
7.3.2.2 NC_88 7-9
8.0 Nine Mile Creek- South 8-1
8.1 General Description of Drainage Area 8-1

8.1.1 Drainage Patterns 8-1
8.1.1.1 Centennial Lakes 8-1
8.1.1.2 South Pond (Border Basin) 8-1
8.1.1.3 Nine Mile South 8-2
8.2 Stormwater System Analysis and Results 8-2
8.2.1 Hydrologic/Hydraulic Modeling Results 8-2
8.2.2 Water Quality Modeling Results 8-4
8.3 Implementation Considerations 8-5
8.3.1 Flood Protection Projects 8-5
8.3.1.1 7001 & 7025 France Avenue (CL_51) 8-5
8.3.2 Construction/Upgrade of Water Quality Basins 8-6
8.3.2.1 West 77th Street & T.H. 100 8-6
8.3.2.2 NMS_76 8-6
8.3.2.3 NMS_104 8-7
8.3.2.4 NMS_72 & NMS_74 8-7
8.3.2.5 SP_1 (South Pond/Border Basin) 8-7
9.0 Nine Mile South Fork 9-1
9.1 General Description of Drainage Area 9-1
9.1.1 Drainage Patterns 9-1
9.1.1.1 Arrowhead Lake 9-1
9.1.1.2 Indianhead Lake 9-2
9.1.1.3 Pawnee Pond 9-2
9.1.1.4 Eden Prairie 9-2
9.1.1.5 Braemar Arena/Public Works 9-2
9.1.1.6 Nine Mile South Fork 9-2
9.2 Stormwater System Analysis and Results 9-3
9.2.1 Hydrologic/Hydraulic Modeling Results 9-3
9.2.2 Water Quality Modeling Results 9-5
9.3 Implementation Considerations 9-5
9.3.1 Flood Protection Projects 9-6
9.3.1.1 6309 Post Lane (AH_31) 9-6
9.3.1.2 Braemar Golf Course (NMSB_62) 9-7
9.3.1.3 Paiute Pass & Sally Lane Intersection (NMSB_83, NMSB_84) 9-7
9.3.1.4 7009 & 7013 Sally Lane Backyard Depression Area (NMSB_70) 9-7
9.3.2 Construction/Upgrade of Water Quality Basins 9-7
9.3.2.1 NMSB_3 & NMSB_2 9-8
9.3.2.2 NMSB_12 9-8
9.3.2.3 NMSB_86 9-8
9.3.2.4 NMSB_7 9-9

9.3.2.5 NMSB_85 9-9
10.0 Southwest Ponds (Dewey Hill Road Area) 10-1
10.1 General Description of Drainage Area 10-1
10.1.1 Drainage Patterns 10-1
10.1.1.1 Southwest Ponds 10-1
10.1.1.2 Nine Mile 494 10-1
10.2 Stormwater System Analysis and Results 10-2
10.2.1 Hydrologic/Hydraulic Modeling Results 10-2
10.2.2 Water Quality Modeling Results 10-3
10.3 Implementation Considerations 10-4
10.3.1 Flood Protection Projects 10-5
10.3.1.1 7411 Coventry Way (SWP_14) 10-5
10.3.1.2 7317 Cahill Road (SWP_46) 10-5
10.3.1.3 7709 Stonewood Court (NM494_4) 10-5
10.3.2 Construction/Upgrade of Water Quality Basins 10-6
11.0 T.H. 169 North 11-1
11.1 General Description of Drainage Area 11-1
11.1.1 Drainage Patterns 11-1
11.2 Stormwater System Analysis and Results 11-1
11.2.1 Hydrologic/Hydraulic Modeling Results 11-1
11.2.2 Water Quality Modeling Results 11-3
11.3 Implementation Considerations 11-4
11.3.1 Flood Protection Projects 11-4
11.3.2 Construction/Upgrade of Water Quality Basins 11-4
12.0 Northeast Minnehaha Creek 12-1
12.1 General Description of Drainage Area 12-1
12.1.1 Drainage Patterns 12-1
12.1.1.1 Morningside 12-1
12.1.1.2 Minnehaha Creek North 12-1
12.1.1.3 Edina Country Club 12-2
12.2 Stormwater System Analysis and Results 12-2
12.2.1 Hydrologic/Hydraulic Modeling Results 12-2
12.2.2 Water Quality Modeling Results 12-4
12.3 Implementation Considerations 12-5
12.3.1 Flood Protection Projects 12-5
12.3.1.1 4000 West 42nd Street and 4100, 4104, and 4108 France Avenue (MS_40) 12-5
12.3.1.2 4308 France Avenue (MS_17) 12-6

12.3.1.3 4300, 4214, and 4212 Branson Street (MS_3) 12-6
12.3.1.4 4140 and 4150 West 44th Street (MS_7) 12-6
12.3.1.5 Arden Avenue (MHN_14) 12-7
12.3.2 Construction/Upgrade of Water Quality Basins 12-7
13.0 Southeast Minnehaha Creek 13-1
13.1 General Description of Drainage Area 13-1
13.1.1 Drainage Patterns 13-1
13.1.1.1 Lake Pamela 13-1
13.1.1.2 Minnehaha Creek South 13-1
13.1.1.3 Melody Lake 13-2
13.2 Stormwater System Analysis and Results 13-2
13.2.1 Hydrologic/Hydraulic Modeling Results 13-2
13.2.2 Water Quality Modeling Results 13-4
13.3 Implementation Considerations 13-5
13.3.1 Flood Protection Projects 13-5
13.3.1.1 6213 Ewing Avenue (LP_15) 13-5
13.3.1.2 3600 West Fuller Street (MHS_4) 13-6
13.3.1.3 5605, 5609, 5613, 5617, 5621, 5625, and 5629 South Beard Avenue (MHS_79) 13-6
13.3.1.4 5837, 5833, 5829, 5825 South Chowen Avenue (LP_24) 13-7
13.3.1.5 Chowen Avenue and West 60th Street (LP_27) 13-7
13.3.1.6 5912, 5916, 5920, 5924, 5928 Ashcroft Avenue and 5925 Concord Avenue (MHS_51) 13-7
13.3.1.7 5840 and 5836 Ashcroft Avenue (MHS_89) 13-7
13.3.1.8 5609 and 5605 Dalrymple Road (MHS_24) and 5610 and 5612 St. Andrews Avenue (MHS_66) 13-7
13.3.1.9 5701 Dale Avenue (ML_12) 13-8
13.3.1.10 5213 and 5217 Richwood Drive (ML_7) 13-8
13.3.2 Construction/Upgrade of Water Quality Basins 13-8
13.3.3 Stream Improvement Projects 13-8
13.3.3.1 Minnehaha Creek Reach 14 Stream Restoration 13-8
14.0 Northwest Minnehaha Creek 14-1
14.1 General Description of Drainage Area 14-1
14.1.1 Drainage Patterns 14-1
14.1.1.1 T.H. 100 14-1
14.1.1.2 Hopkins 14-1
14.1.1.3 Interlachen 14-2
14.2 Stormwater System Analysis and Results 14-2
14.2.1 Hydrologic/Hydraulic Modeling Results 14-2

14.2.2 Water Quality Modeling Results 14-4
14.3 Implementation Considerations 14-4
14.3.1 Flood Protection Projects 14-5
14.3.1.1 Interlachen Landlocked Area 14-5
14.3.2 Construction/Upgrade of Water Quality Basins 14-5
15.0 Issues and Implementation Program 15-1
15.1 Water Quality/NPDES Phase II MS4 General Permit 15-1
15.1.1 NPDES Phase II MS4 Storm Water Pollution Prevention Program 15-1
15.1.1.1 Public Education and Outreach 15-2
15.1.1.2 Public Involvement and Public Participation 15-2
15.1.1.3 Illicit Discharge Detection and Elimination 15-3
15.1.1.4 Construction Site Stormwater Runoff Control 15-3
15.1.1.5 Post-Construction Stormwater Runoff Control 15-4
15.1.1.6 Pollution Prevention and Good Housekeeping Methods 15-5
15.1.2 Nondegradation Report 15-6
15.1.3 Impaired Waters and TMDL Issues 15-7
15.1.3.1 Nine Mile Creek 15-9
15.1.3.2 Minnehaha Creek 15-10
15.1.3.3 Lake Cornelia 15-10
15.1.3.4 Lake Edina 15-10
15.1.3.5 Other Downstream Waterbodies 15-11
15.2 Specific MCWD Tasks/Issues 15-11
15.2.1 Phosphorus Load Reduction 15-11
15.2.1.1 Pamela Park Water Quality Improvement Project 15-12
15.2.1.2 Underground Stormwater Treatment Structures and Sump Manholes15-13
15.2.1.3 Street Sweeping 15-13
15.2.1.4 Impervious Surface Reduction 15-14
15.2.2 Landlocked Basins 15-14
15.2.2.1 White Oaks Landlocked Area 15-14
15.2.2.2 Interlachen Landlocked Area 15-15
15.2.3 Flooding or Modeled High Water Locations 15-15
15.2.3.1 Kresse Circle 15-15
15.2.3.2 Minnehaha Creek at West 58th Street 15-15
15.2.3.3 Utility Bridge in Arden Park 15-16
15.2.4 Flow Velocity and Erosion 15-16
15.2.4.1 Downstream of 50th Street 15-16
15.2.4.2 Storm Sewer Discharge North of Pamela Park 15-17
15.2.4.3 Storm Sewer Outfall to Ditch North of Pamela Park 15-17
15.2.5 Potential Capital Projects and Other Issues 15-17

15.2.6 Housekeeping Requirements 15-17
15.3 Specific NMCWD Tasks/Issues 15-18
15.3.1 Use Attainability Analyses 15-18
15.3.1.1 Mirror Lake Use Attainability Analysis 15-18
15.3.1.2 Arrowhead and Indianhead Lakes Use Attainability Analysis 15-18
15.3.1.3 Lake Cornelia Use Attainability Analysis 15-19
15.3.2 Water Quality Improvement Projects 15-19
15.4 Financial Considerations 15-19
15.5 Plan Update and Amendment Procedure 15-20
15.6 Regulatory Framework and Agency Responsibilities 15-21
15.6.1 City of Edina 15-21
15.6.2 Watershed Management Organizations 15-23
15.6.2.1 Minnehaha Creek Watershed District 15-23
15.6.2.2 Nine Mile Creek Watershed District 15-25
15.6.3 The Metropolitan Council 15-25
15.6.4 Hennepin County 15-26
15.6.5 Minnesota Department of Natural Resources 15-26
15.6.6 Minnesota Board of Water and Soil Resources 15-27
15.6.7 Minnesota Pollution Control Agency (MPCA) 15-27
15.6.8 Minnesota Department of Health 15-28
15.6.9 Minnesota Environmental Quality Board (EQB) 15-28
15.6.10 Minnesota Department of Transportation (Mn/DOT) 15-29
15.6.11 U.S. Army Corps of Engineers (COE) 15-29
15.7 Implementation Priorities 15-30
16.0 Wetlands 16-1
16.1 City of Edina Wetlands Inventory- 1999 16-1
16.1.1 Delineation 16-1
16.1.2 Dominant Vegetation 16-2
16.1.3 Wetland Functional Assessment 16-2
16.1.3.1 Hydrology 16-2
16.1.3.2 Vegetative Diversity 16-2
16.1.3.3 Wildlife Habitat 16-3
16.1.3.4 Fishery Habitat 16-3
16.1.3.5 Flood/Stormwater Attenuation 16-3
16.1.3.6 Water Quality Protection 16-3
16.1.3.7 Shoreline Protection 16-3
16.1.3.8 Aesthetics/Recreation/Education and Science 16-4
16.1.4 Wetland Sensitivity to Stormwater Input 16-4

16.2 MCWD Functional Assessment of Wetlands – 2003 16-7
16.2.1 Delineation and Inventory 16-7
16.2.2 Critical Wetland Resources 16-7
16.2.3 Wetland Susceptibility to Stormwater 16-8
16.2.4 Wetland Management Classification 16-8
16.3 Circular 39 Wetland Classification 16-8
16.3.1.1 Type 1: Seasonally Flooded Basin, Floodplain Forest 16-8
16.3.1.2 Type 2: Wet Meadow, Fresh Wet Meadow, Wet to Wet-Mesic Prairie, Sedge Meadow, and Calcareous Fen 16-9
16.3.1.3 Type 3: Shallow Marsh 16-9
16.3.1.4 Type 4: Deep Marsh 16-9
16.3.1.5 Type 5: Shallow Open Water 16-9
16.3.1.6 Type 6: Shrub Swamp; Shrub Carr, Alder Thicket 16-9
16.3.1.7 Type 7: Wooded Swamps; Hardwood Swamp, Coniferous Swamp 16-10
16.4 Cowardin Wetland Classification 16-10
16.4.1.1 System 16-10
16.4.1.2 Subsystem 16-11
16.4.1.3 Class, Subclass 16-11
16.4.1.4 Water Regime 16-12
16.4.1.5 Special Modifiers 16-13
16.5 Public Waters 16-14
17.0 References 17-1

List of Tables

Table 1.1 Water Resources Implementation Program 1-5
Table 1.2 Potential Implementation Activities (including Capital Improvements) 1-8
Table 2.1 Historic Summer-average Total Phosphorus Concentrations for Edina Lakes 2-5
Table 2.2 Fishery and Aquatic Invasive Species Information 2-7
Table 4.1 Land Use Impervious Fraction Assumptions for Hydrologic Modeling 4-3
Table 4.2 Horton Infiltration Parameters 4-5
Table 4.3 Roughness Coefficient Assumptions 4-6
Table 4.4 Land Use Impervious Fraction Assumptions for Water Quality Modeling 4-9
Table 4.5 Infiltration Assumptions for Water Quality Modeling 4-11
Table 5.1 Major Watersheds within the Nine Mile Creek—North Drainage Basin 5-1
Table 5.2 Watershed Modeling Results for Subwatersheds in the Nine Mile Creek—North Drainage Basin 5-12
Table 5.3 Hydraulic Modeling Results for XP-SWMM Subwatersheds/Nodes in the Nine Mile Creek—North Drainage Basin 5-18
Table 5.4 Conduit Modeling Results for Subwatersheds in the Nine Mile Creek—North Drainage Basin 5-26
Table 6.1 Major Watersheds within the Nine Mile Creek—Central Drainage Basin 6-1
Table 6.2 Watershed Modeling Results for Subwatersheds in the Nine Mile Creek—Central Drainage Basin 6-9
Table 6.3 Hydraulic Modeling Results for XP-SWMM Subwatersheds/Nodes in the Nine Mile Creek—Central Drainage Basin 6-12
Table 6.4 Conduit Modeling Results for Subwatersheds in the Nine Mile Creek—Central Drainage Basin 6-17
Table 7.1 Major Watersheds within the Lake Cornelia/Lake Edina/Adam's Hill Drainage Basin 7-1
Table 7.2 Watershed Modeling Results for Subwatersheds in the Lake Cornelia/Lake Edina/Adam's Hill Drainage Area 7-10
Table 7.3 Hydraulic Modeling Results for XP-SWMM Subwatersheds/Nodes in the Lake Cornelia/Lake Edina/Adam's Hill Drainage Area 7-16
Table 7.4 Conduit Modeling Results for Subwatersheds in the Lake Cornelia/Lake Edina/Adam's Hill Drainage Area 7-25
Table 8.1 Major Watersheds within the Nine Mile Creek—South Drainage Basin 8-1
Table 8.2 Watershed Modeling Results for Subwatersheds in the Nine Mile Creek—South Drainage Basin 8-8
Table 8.3 Hydraulic Modeling Results for XP-SWMM Subwatersheds/Nodes in the Nine Mile Creek—South Drainage Basin 8-12
Table 8.4 Conduit Modeling Results for Subwatersheds in the Nine Mile Creek—South Drainage Basin 8-19
Table 9.1 Major Watersheds within the Nine Mile South Fork Drainage Basin 9-1
Table 9.2 Watershed Modeling Results for Subwatersheds in the Nine Mile South Fork Drainage Basin 9-10

Table 9.3 Hydraulic Modeling Results for XP-SWMM Subwatersheds/Nodes in the Nine Mile South Fork Drainage Basin 9-14
Table 9.4 Conduit Modeling Results for Subwatersheds in the Nine Mile South Fork Drainage Basin 9-19
Table 10.1 Major Watersheds within the Southwest Ponds Drainage Basin 10-1
Table 10.2 Watershed Modeling Results for Subwatersheds in the Southwest Ponds Drainage Basin 10-7
Table 10.3 Hydraulic Modeling Results for XP-SWMM Subwatersheds/Nodes in the Southwest Ponds Drainage Basin 10-9
Table 10.4 Conduit Modeling Results for Subwatersheds in the Southwest Ponds Drainage Basin10-13
Table 11.1 Major Watershed within the T.H. 169 North Drainage Area 11-1
Table 11.2 Watershed Modeling Results for Subwatersheds in the T.H. 169 North Drainage Basin11-6
Table 11.3 Hydraulic Modeling Results for XP-SWMM Subwatersheds/Nodes in the T.H. 169 North Drainage Basin 11-7
Table 11.4 Conduit Modeling Results for Subwatersheds in the T.H. 169 North Drainage Basin11-8
Table 12.1 Major Watersheds within the Northeast Minnehaha Creek Drainage Basin 12-1
Table 12.2 Watershed Modeling Results For Subwatersheds n the Northeast Minnehaha Creek Drainage Basin 12-8
Table 12.3 Hydraulic Modeling Results for XP-SWMM Subwatersheds/Nodes in the Northeast Minnehaha Creek Drainage Basin 12-12
Table 12.4 Conduit Modeling Results for Subwatersheds in the Northeast Minnehaha Creek Drainage Basin 12-19
Table 13.1 Major Watersheds within the Southeast Minnehaha Creek Drainage Basin 13-1
Table 13.2 Watershed Modeling Results For Subwatersheds n the Southeast Minnehaha Creek Drainage Basin 13-9
Table 13.3 Hydraulic Modeling Results for XP-SWMM Subwatersheds/Nodes in the Southeast Minnehaha Creek Drainage Basin 13-13
Table 13.4 Conduit Modeling Results for Subwatersheds in the Southeast Minnehaha Creek Drainage Basin 13-19
Table 14.1 Major Watersheds within the Northwest Minnehaha Creek Drainage Basin 14-1
Table 14.2 Watershed Modeling Results For Subwatersheds n the Northwest Minnehaha Creek Drainage Basin 14-7
Table 14.3 Hydraulic Modeling Results for XP-SWMM Subwatersheds/Nodes in the Northwest Minnehaha Creek Drainage Basin 14-9
Table 14.4 Conduit Modeling Results for Subwatersheds in the Northwest Minnehaha Creek Drainage Basin 14-13
Table 15.1 City of Edina Waters on MPCA's 303(d) Impaired Waters List 15-9
Table 15.2 Potential Funding Sources for Plan Implementation 15-20
Table 15.3 Water Resources Implementation Program 15-31
Table 15.4 Potential Implementation Activities (including Capital Improvements)..... 15-34
Table 16.1 Susceptibility of Wetlands to Degradation by Stormwater Impacts 16-5
Table 16.2 Management Recommendations for Each Wetland Sensitivity Classification..... 16-6
Table 16.3 MnDNR Protected Waters and Wetlands within Edina 16-14

List of Figures

Figure 2.1 Major Drainage Areas 2-9
Figure 2.2 Edina Soils Classification 2-10
Figure 2.3 Water Quality Monitoring Stations 2-11
Figure 2.4 Edina Parks and Recreational Areas 2-12
Figure 2.5 Threatened and Endangered Species 2-13
Figure 2.6 Pollutant Sources 2-14
Figure 5.1 Nine Mile Creek—North Drainage Basin 5-35
Figure 5.2 Nine Mile Creek—North Major Watersheds 5-36
Figure 5.3 Nine Mile Creek—North Hydraulic Model Results 5-37
Figure 5.4 Nine Mile Creek—North Water Quality Modeling Results 5-38
Figure 6.1 Nine Mile Creek—Central Drainage Basin 6-22
Figure 6.2 Nine Mile Creek—Central Major Watersheds 6-23
Figure 6.3 Nine Mile Creek—Central Hydraulic Model Results 6-24
Figure 6.4 Nine Mile Creek—Central Water Quality Modeling Results 6-25
Figure 7.1 Lake Cornelia/Lake Edina/Adam's Hill Drainage Basin 7-35
Figure 7.2 Lake Cornelia/Lake Edina/Adam's Hill Major Watersheds 7-36
Figure 7.3 Lake Cornelia/Lake Edina/Adam's Hill Hydraulic Model Results 7-37
Figure 7.4 Lake Cornelia/Lake Edina/Adam's Hill Water Quality Modeling Results 7-38
Figure 8.1 Nine Mile Creek—South Drainage Basin 8-26
Figure 8.2 Nine Mile Creek—South Major Watersheds 8-27
Figure 8.3 Nine Mile Creek—South Hydraulic Model Results 8-28
Figure 8.4 Nine Mile Creek—South Water Quality Modeling Results 8-29
Figure 9.1 Nine Mile South Fork Drainage Basin 9-25
Figure 9.2 Nine Mile South Fork Major Watersheds 9-26
Figure 9.3 Nine Mile South Fork Hydraulic Model Results 9-27
Figure 9.4 Nine Mile South Fork Water Quality Modeling Results 9-28
Figure 10.1 Southwest Ponds Drainage Basin 10-16
Figure 10.2 Southwest Ponds Major Watersheds 10-17
Figure 10.3 Southwest Ponds Hydraulic Model Results 10-18
Figure 10.4 Southwest Ponds Water Quality Modeling Results 10-19
Figure 11.1 T.H. 169 North Drainage Basin 11-9
Figure 11.2 T.H. 169 North Major Watersheds 11-10
Figure 11.3 T.H. 169 North Water Quality Modeling Results 11-11
Figure 12.1 Northeast Minnehaha Creek Drainage Basin 12-23
Figure 12.2 Northeast Minnehaha Creek Major Watersheds 12-24
Figure 12.3 Northeast Minnehaha Creek Hydraulic Model Results 12-25
Figure 12.4 Northeast Minnehaha Creek Water Quality Modeling Results 12-26
Figure 13.1 Southeast Minnehaha Creek Drainage Basin 13-24
Figure 13.2 Southeast Minnehaha Creek Major Watersheds 13-25

Figure 13.3 Southeast Minnehaha Creek Hydraulic Model Results 13-26
Figure 13.4 Southeast Minnehaha Creek Water Quality Modeling Results 13-27
Figure 14.1 Northwest Minnehaha Creek Drainage Basin 14-16
Figure 14.2 Northwest Minnehaha Creek Major Watersheds 14-17
Figure 14.3 Northwest Minnehaha Creek Hydraulic Model Results 14-18
Figure 14.4 Northwest Minnehaha Creek Water Quality Modeling Results 14-19
Figure 15.1 Minnehaha Creek Watershed District Key Conservation Areas 15-38
Figure 15.2 Minnehaha Creek Watershed District Key Conservation Areas 15-39
Figure 16.1 Wetlands within the City of Edina 16-16
Figure 16.2 Wetlands Classification 16-17

List of Appendices

Appendix A	Storm Water Pollution Prevention Program for the Management of Municipal Separate Storm Sewer Systems within the City of Edina
Appendix B	Nondegradation Report
Appendix C	2010-2019 Anticipated Local Bituminous Street Reconstruction Projects
Appendix D	Modified Minnesota Routine Assessment Method for Evaluating Wetland Functions (MNRAM) Version 2.0
Appendix E	GIS Wetlands Inventory Database

List of Acronyms

BMPs	Best Management Practices
BWSR	Minnesota Board of Water & Soil Resources
CAMP	Citizen Assisted Monitoring Program
CD	County Ditch
CFS	Cubic Feet per Second
CIP	Capital Improvement Program
COE	United States Army Corps of Engineers
CWA	Clean Water Act
CWRMP	Comprehensive Water Resources Management Plan
DNR	Minnesota Department of Natural Resources
DWSMA	Drinking Water Supply Management Areas
EAW	Environmental Assessment Worksheet
EIS	Environmental Impact Statement
EPA	United States Environmental Protection Agency
EQB	Environmental Quality Board
FAW	Functional Assessment of Wetlands (MCWD)
FEMA	Federal Emergency Management Agency
FIN	Fishing in the Neighborhood
GIS	Geographic Information Systems
HCWI	Hennepin County Wetland Inventory
IBI	Index of Biotic Integrity
ISTS	Individual Sewage Treatment Systems
LA	Load Allocation
LGU	Local Government Unit
MCWD	Minnehaha Creek Watershed District
MDH	Minnesota Department of Health
MEP	Maximum Extent Practicable
MnRAM	Minnesota Routine Assessment Method
Mn/DOT	Minnesota Department of Transportation
MPCA	Minnesota Pollution Control Agency
MS4	Municipal Separate Storm Sewer System

MSL	Mean Sea Level
MUSA	Metropolitan Urban Service Area
NMCWD	Nine Mile Creek Watershed District
NPDES	National Pollutant Discharge Elimination System
NRCS	Natural Resources Conservation Service
NURP	Nationwide Urban Runoff Program
NWI	National Wetlands Inventory
NWL	Normal Water Level
OHWL	Ordinary High Water Level
PWI	Public Waters Inventory
SCS	Soil Conservation Service
SHSAM	Sizing hydrodynamic Separators and Manholes
SWMM	Storm Water Management Model
SWPPP	Storm Water Pollution Prevent Plan/Program
TBD	To Be Determined
TIF	Tax Increment Financing
TMDL	Total Maximum Daily Load
TP	Total Phosphorus
TSS	Total Suspended Solids
UAA	Use Attainability Analysis
USFWS	United States Fish and Wildlife Service
VIC	Voluntary Investigation and Clean-up
VOC	Volatile Organic Compound
WCA	Wetland Conservation Act
WLA	Waste Load Allocation
WMO	Watershed Management Organization